



## C520

# HART Compatible Universal Dual-input 2-wire Transmitters



The 520 transmitters are universal, isolated, dual-input temperature transmitters with additional voltage and resistance input. The C520N is approved for Non-Incendive use in Ex-Zone 2. C520X/C520XS are Intrinsically Safe versions for use in Ex-Zone 0, 1 and 2. The transmitters are compatible with the HART 6 protocol. Typical characteristics are the high accuracy, stability and reliability combined with a robust housing. The double inputs enable new safety features such as Sensor Backup and Sensor Drift Monitoring.


- Universal, dual-input for RTD and T/C
- SIL 2 compatible according to IEC 61508-2
- HART 6 protocol
- High accuracy
- 5 year guaranteed stability
- Withstands 10 g vibrations
- Complies with NAMUR NE 21, NE 43, NE 53, NE 89 and NE 107
- EMC immunity according to Criteria A
- Sensor Backup
- Sensor Drift Monitoring
- Sensor Isolation Monitoring
- Sensor matching
- 50 point customized linearization
- Integrated in Emerson AMS and Siemens PDM systems

## Specifications:


<b>Input RTD</b>		
Pt100	(IEC 60751, $\alpha=0.00385$ )	-200 to +850 °C
PtX (10 ≤ X ≤ 1000)	(IEC 60751, $\alpha=0.00385$ )	Corresp. to max. 4 000 Ω
Pt100	(JIS C 1604, $\alpha=0.003916$ )	-200 to +850 °C
Ni100	(DIN 43760)	-60 to +250 °C
Ni120	(Edison Curve No. 7)	-60 to +250 °C
Ni1000	(DIN 43760)	-50 to +180 °C
Cu10	(Edison Cu Windings No. 15)	-50 to +200 °C
Input connections	One sensor	2-, 3- and 4-wire connection
	Two sensors	2- and 3-wire connection
<b>Input Thermocouple</b>		
	T/C types	B, C, D, E, J, K, N, R, S, T
<b>Input Resistance</b>		
	Potentiometer	100 to 4000 Ω, 2-, 3- and 4-wire connection
<b>Input Voltage</b>		
		-10 to +1000 mV
<b>Double inputs for RTD and Thermocouple</b>		
Measure mode		T1 or T2 or difference, average, min, max of T1 and T2
Sensor Redundancy		Automatic switchover to undamaged sensor
Sensor Drift Monitoring		Adjustable maximum temp. difference T1-T2
<b>Output</b>		
Output signal	Temperature linear	4-20 mA, 20-4 mA or customized
NAMUR compliance	Measure and fail currents	NAMUR, NE 43
<b>Galvanic isolation</b>		
		1500 VAC, 1 min
<b>Ex-classifications</b>		
	C520N	ATEX: II 3 G Ex nL IIC T4-T6 Pending: FM, CSA, IECEx, GOST
	C520X/C520XS	ATEX: II 1 G Ex ia IIC T4-T6 Pending: FM, CSA, IECEx, GOST
<b>Power supply</b>		
	C520/C520N/C520S	10 to 36 VDC, Standard power supply
	C520X/C520XS	10 to 30 VDC, I.S. power supply
<b>Ambient temperature</b>		
	Storage/operation	-40 to +85 °C
<b>Accuracy</b>		
	RTD (Pt and Ni sensors)	Max. of $\pm 0.1$ °C or $\pm 0.05$ % of span
	Thermocouple	Typical $\pm 0.05$ % of span
	Resistance/voltage	See data sheet
<b>Long-term stability</b>		
		Max. drift: $\pm 0.05$ % of span / 5 years
<b>Connection head</b>		
		DIN B or larger

## Input connections


See data sheet for more alternatives

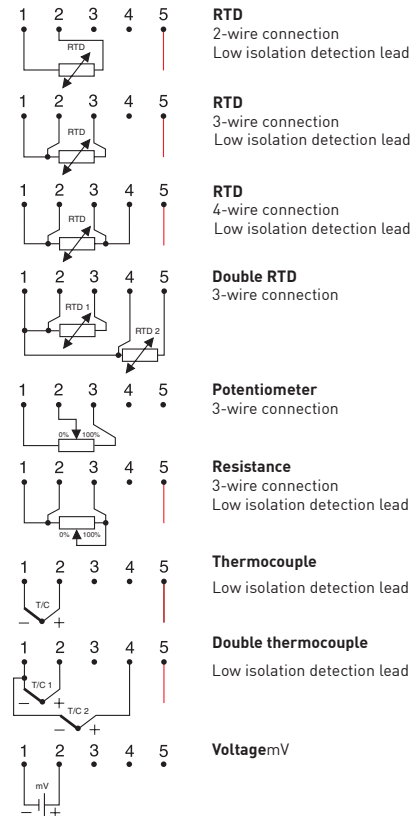


## Output connections



## Output load diagram

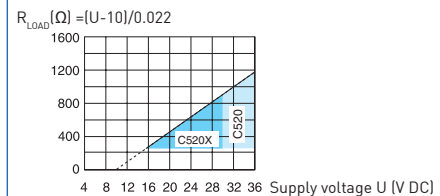

## Dimensions

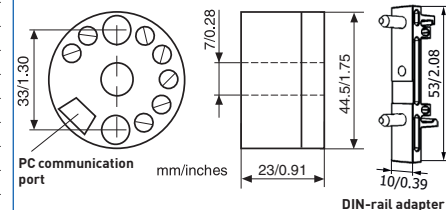

## Ordering information

C520	70C5200010
C520S, SIL 2 compatible	70C5200S10
C520N	70C520N010
C520X	70C520X010
C520XS, SIL 2 compatible	70C520XS10
ICON PC configuration kit (USB-conn.)	70CFGUS001
Configuration	70CAL00001
Head mounting kit	70ADA00017
DIN-rail adapter	70ADA00015